

25Gbps SFP28 1310nm Optical Transceiver 40KMLC DDM**Features:**

- Up to 25.78Gb/s data links
- 1310nm DFB laser and APD receiver
- Up to 40km on 9/125um SMF
- Hot-pluggable SFP footprint
- Digital diagnostic capabilities
- Class 1 laser safety certified
- Cost effective SFP28 solution, enables higher port densities and greater bandwidth
- RoHS-10 compliant and lead-free
- Single +3.3V power supply
- 2-wire interface for management specifications
- compliant with SFF-8472 digital diagnostic monitoring interface for optical transceivers
- All-metal housing for superior EMI performance
- Case operating temperature

Commercial: 0°C to +70°C Industrial: -

40°C to +85°C

Applications:

- High-speed storage area networks
- Computer cluster cross-connect
- Custom high-speed data pipes
- Inter Rack Connection

Specification**Absolute Maximum Ratings**

Parameter	Symbol	Min	Max	Unit	Notes
Storage Temperature	Ts	-40	85	oC	
Power Supply Voltage	VCC	-0.5	3.6	V	
Relative Humidity (non-condensation)	RH	5	95	%	
Damage Threshold	THd	-3		dBm	

Recommended Operating Conditions and Power Supply Requirements

Parameter	Symbol	Min	Typical	Max	Unit	Notes
		0		70		commercial



Operating Case Temperature	TOP	-40		85	°C	Industrial
Power Supply Voltage	VCC	3.135	3.3	3.465	V	
Data Rate			25.78		Gb/s	
Control Input Voltage High		2		Vcc	V	
Control Input Voltage Low		0		0.8	V	
Link Distance (SMF)	D			40	km	9/125um

General Description

25Gb/s SFP28 transceiver consists of five sections: the LD driver, the limiting amplifier, the digital diagnostic monitor, the DFB laser and the APD photo-detector. The module data link up to 40km in 9/125um single mode fiber.

The module optical connection is duplex LC and shall be compatible with SFP+ 28Gbps and backward compatible with legacy 10G SFP+ pluggable. The SFP28 LR module is a dual directional device with a transmitter and receiver plus a control management interface (2-wire interface) in the same physical package. 2-wire interface is used for serial ID, digital diagnostics and module control function.

The transmitter converts 25Gbit/s serial PECL or CML electrical data into serial optical data compliant with the 25GBASE-ER standard. An open collector compatible Transmit Disable (Tx_Dis) is provided. Logic “1” or no connection on this pin will disable the laser from transmitting. Logic “0” on this pin provides normal operation. The transmitter has an internal automatic power control loop (APC) to ensure constant optical power output across supply voltage and temperature variations. An open collector compatible Transmit Fault (Tx_Fault) is provided. TX_Fault is module output contact that when high, indicates that the module transmitter has detected a fault condition related to laser operation or safety. The TX_Fault output contact is an open drain/collector and shall be pulled up to the Vcc_Host in the host with a resistor in the range 4.7-10 kΩ. TX_Disable is a module input contact. When TX_Disable is asserted high or left open, the SFP28 module transmitter output shall be turned off. This contact shall be pulled up to VccT with a 4.7 kΩ to 10 kΩ resistor

The receiver converts 25Gbit/s serial optical data into serial PECL/CML electrical data. An open collector compatible Loss of Signal is provided. Rx_LOS when high indicates an optical signal level below that specified in the relevant standard. The Rx_LOS contact is an open drain/collector output and shall be pulled up to Vcc_Host in the host with a resistor in the range 4.7-10 kΩ, or with an active termination. Power supply filtering is recommended for both the transmitter and receiver. The Rx_LOS signal is intended as a preliminary indication to the system in which the SFP28 is installed that the received signal strength is below the specified range. Such an indication typically points



to non-installed cables, broken cables, or a disabled, failing or a powered off transmitter at the far end of the cable.

Digital Diagnostic Specifications

Parameter	Symbol	Min.	Max	Unit	Notes
Temperature monitor absolute error	DMI_Temp	-3	3	degC	Over operating temp
Supply voltage monitor absolute error	DMI_VCC	-0.15	0.15	V	Full operating range
RX power monitor absolute error	DMI_RX	-3	3	dB	
Bias current monitor	DMI_bias	-10%	10%	mA	
TX power monitor absolute error	DMI_TX	-3	3	dB	

Electrical Interface Characteristics

Parameter	Symbol	Min.	Typ.	Max	Unit	Notes
Power Consumption	p			1.75	W	
Supply Current	Icc			520	mA	
Transmitter						
Single-ended Input Voltage Tolerance	Vcc	-0.3		4.0	V	
Common mode voltage tolerance		15			mV	
Differential Input Voltage Swing	Vin,pp	180		700	mVpp	
Differential Input Impedance	Zin	90	100	110	Ohm	1
Transmit Disable Assert Time				10	us	
Transmit Disable Voltage	Vdis	Vcc-1.3		Vcc	V	
Transmit Enable Voltage	Ven	Vee		Vee +0.8	V	2
Receiver						
Single-ended Input Voltage Tolerance	Vcc	-0.3		4.0	V	
Differential Output Voltage Swing	Vout,pp	300		900	mVpp	
Differential Output Impedance	Zout	90	100	110	Ohm	3
Data output rise/fall time	Tr/Tf	9.5			ps	4
LOS Assert Voltage	VlosH	Vcc-1.3		Vcc	V	5



LOS De-assert Voltage	VlosL	Vee		Vee +0.8	V	5
-----------------------	-------	-----	--	----------	---	---

Notes:

1. Connected directly to TX data input pins. AC coupled thereafter.
2. Or open circuit.
3. Input 100 ohms differential termination.
4. These are unfiltered 20-80% values.
5. Loss of Signal is LVTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.

Optical Characteristics

Parameter	Symbol	Min.	Typical	Max	Unit	Notes
Transmitter						
Center Wavelength	λ_c	1295	1310	1325	nm	
Optical Spectral Width	$\Delta\lambda$			1	nm	
Average Optical Power	PAVG	-3		6	dBm	1
Side Mode Suppression Ratio	SMSR	20			dB	
Optical Extinction Ratio	ER	3.5			dB	
Transmitter OFF Output Power	Poff			-30	dBm	
Transmitter and Dispersion Penalty	TDP			2.7	dB	
Optical Return Loss Tolerance	ORLT			20	dB	
Transmitter Eye Mask	Compliant with IEEE802.3ae					
Receiver						
Center Wavelength	λ_c	1295	1310	1325	nm	
Receiver Sensitivity (OMA)	Sen.			-14	dBm	2
Stressed Receiver Sensitivity (OMA)				-11.5	dBm	2
Average Receive Power		-20		-4	dBm	
Input Saturation Power (overload)	Psat	-8			dBm	
LOS Assert	LOSA	-30			dBm	
LOS De-assert	LOSD			-21	dBm	
Damage Threshold	THd	-3			dBm	
LOS Hysteresis	LOSH	0.5			dB	



Notes:

1. Class 1 Laser Safety per FDA/CDRH and IEC-825-1 regulations.
2. Measured with Light source 1310nm, ER=3.5dB; BER =<10⁻¹² @ PRBS=2³¹-1 NRZ.

PIN DESCRIPTIONS


PIN	Name	Name/Description	Notes
1	VeeT	Transmitter Ground	1
2	TX_Fault	Transmitter Fault	
3	TX_Disable	Transmitter Disable; Turns off transmitter laser output	
4	SDA	Two wire serial interface Data Line (LVCMOS-I/O) (MOD-DEF2)	2
5	SCL	Two wire serial interface Clock Line (LVCMOS-I/O) (MOD-DEF1)	2
6	MOD_ABS	Module Definition, Grounded in the module	
7	RS0	Rx Rate Select:	
8	RX_LOS	Receiver Loss of Signal Indication Active LOW	
9	RS1	Transmitter Rate Select (not used)	
10	VeeR	Receiver Ground	1
11	VeeR	Receiver Ground	1
12	RD-	Receiver Inverted Data Output	
13	RD+	Receiver Data Output	
14	VeeR	Receiver Ground	1
15	VccR	Receiver Power - +3.3V	
16	VccT	Transmitter Power - +3.3 V	
17	VeeT	Transmitter Ground	1
18	TD+	Transmitter Non-Inverted Data Input	
19	TD-	Transmitter Inverted Data Input	
20	VeeT	Transmitter Ground	1

Notes:


1. Module ground pins GND are isolated from the module case.
2. Shall be pulled up with 4.7K-10Kohms to a voltage between 3.15V and 3.47V on the host board.



Pin DIAGRAM

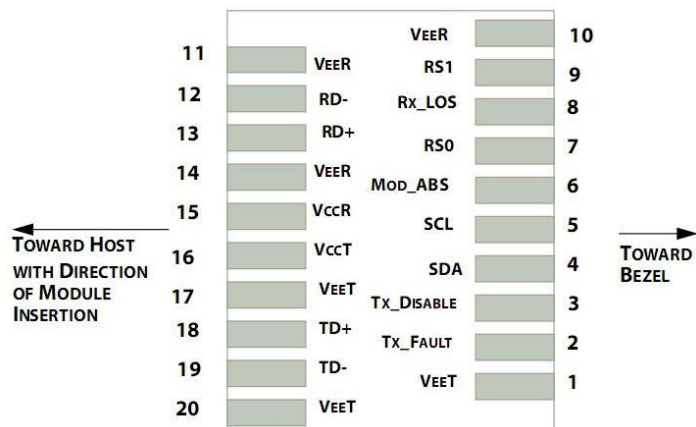

Digital Diagnostic Functions

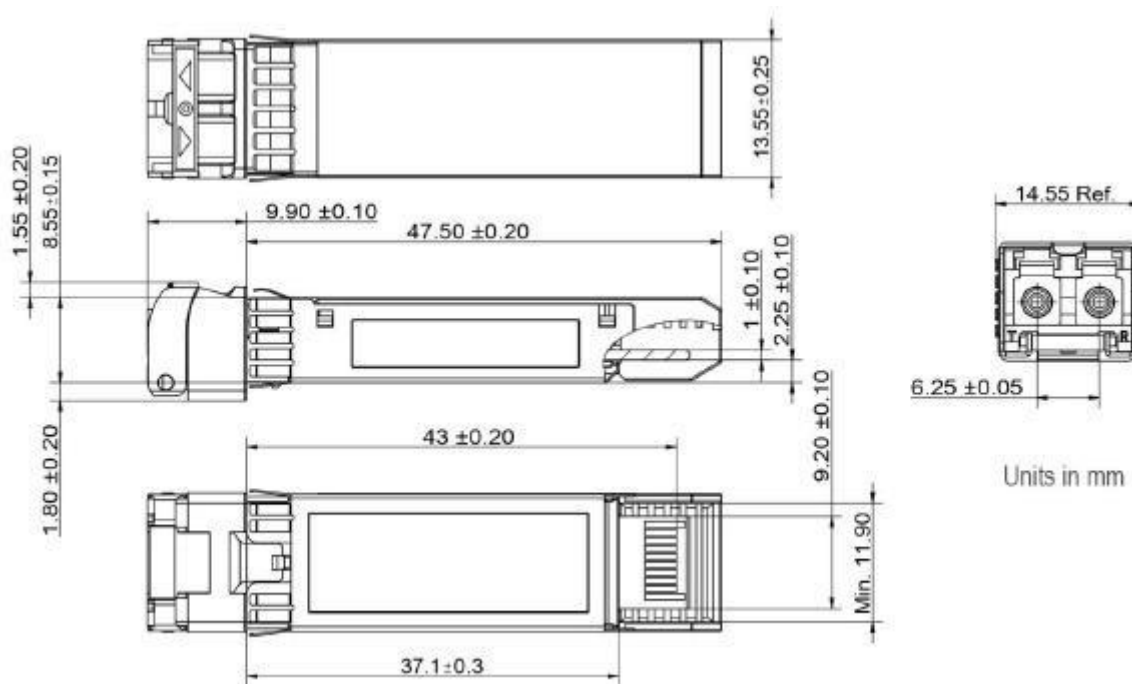

Ordering information:

Part Number	Product Description
25GDF1310-40LAT	SFP28 25G 1310nm 40km LC DDM

