

Wall-Mount Network Cabinet

Feature:


- 19" standard installation welded frame, reliable structure.
- Assembled frame structure, easy handling, to maximize save shipping cost.
- Standing or wall mounting installation, adjustable feet and castor are optional.
- Easy mounting installation (patent).
- Removable side panels, side locks optional.
- Knock out hole for entering cable on both of top cover and bottom panel.
- Toughened glass front door, turning angle is over 180 degrees.




Physical Characteristics (Overall):

Wall mount network cabinet (single section)	
Main Material	SPCC cold rolled steel
Thickness	Mounting profile 1.5mm, mounting angle 1.2mm
Surface Finish	Degreasing, pickling, phosphoric, powder coated
Degree of Protection	IP20
Loading Capacity	Static loading: 60KG
Color	Black RAL9004, Grey RAL7035

Product Details:



Installation in Structure:

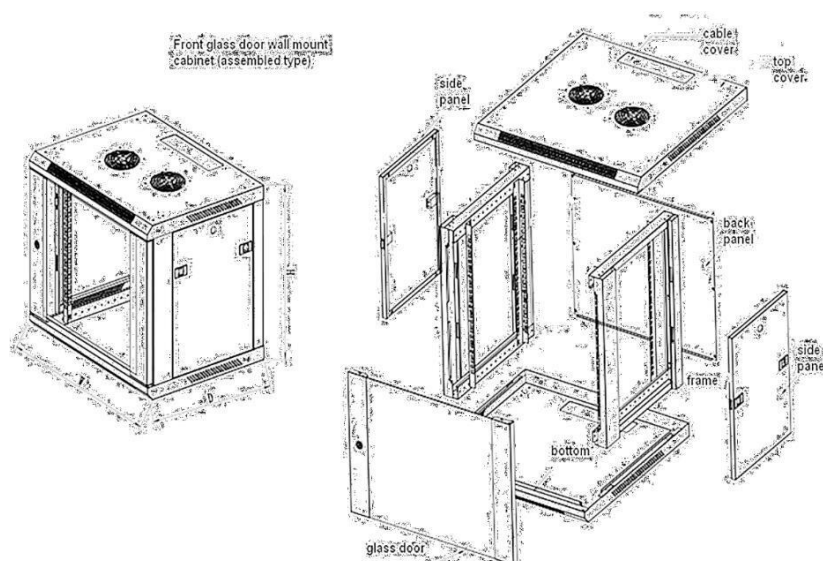

Wall-Mount Network Cabinet (Single Section)

Main Parts:

S/N	Specification	Quantity	Unit	Material	Surface Finish	Remark
1	Frame	2	Piece	SPCC Cold rolled steel 1.2	Powder coated	-
2	Side panel	2	Piece	SPCC Cold rolled steel 1.0	Powder coated	-
3	Back panel	1	Piece	SPCC Cold rolled steel 1.0	Powder coated	-
4	Bottom panel	1	Piece	SPCC Cold rolled steel 1.0	Powder coated	-
5	Top cover	1	Piece	SPCC Cold rolled steel 1.0	Powder coated	-
6	Front glass door	1	Piece	5MM Toughened glass	-	-
7	Mounting profile	4	Piece	SPCC Cold rolled steel 1.5	Powder coated	-
8	Cable cover	2	Piece	SPCC Cold rolled steel 1.0	Powder coated	-
9	Round lock	1	Piece	-	-	Side lock optional
10	M6 screw	12/20	Set	-	-	20 pcs for 15U & 18U
11	Allen wrench	1	Piece	-	-	-

Dimension:

Part Number	Capacity	Width (mm)	Depth (mm)	Height (mm)
PPSL-WM-5304	4U	530	350	28
PPSL-WM-6404		600	450	0
PPSL-WM-6406	450		37	
PPSL-WM-6606	600		0	
PPSL-WM-6409	9U		450	50
PPSL-WM-6609			600	0
PPSL-WM-6412	12U		450	63
PPSL-WM-6612			600	5
PPSL-WM-6415	15U		450	77
PPSL-WM-6615			600	0
PPSL-WM-6418	18U		450	90
PPSL-WM-6618			600	0

